




VIS-8013

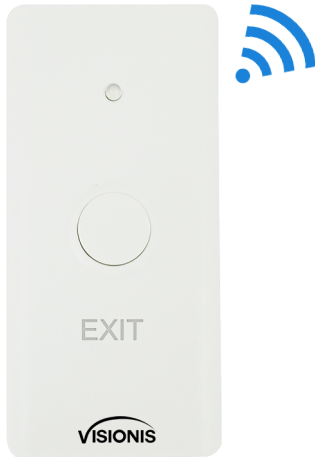

VIS-8014

Features

- Available Colors: Black (VIS-8013) - White (VIS-8014)
- Operating Voltage: 1 unit of 2023 Lithium battery (Included)
- Operating Temperature: -20°C~60°C (-4°F~140°F)
- Communication frequency: 2.4G
- Communication distance: 15m Max. (50 feet)

Model No.	VIS-8013 / VIS-8014
Operating Voltage	1 unit of 2023 Lithium battery
Idle Current	6uA
Working Current	≤5mA
Communication Frequency	2.4G
Communication Distance	15m Maximum (50 feet)
Relay Contact Load	2Amp Maximum
Environment	Indoor
Operating Temperature	-20°C~60°C (-4°F~140°F)
Operating Humidity	0%~86%RH
Physical	ABS Shell
Dimensions	83L × 40W × 16D (mm) - 3.26L x 1.57W x 0.62D (in.)
Unit Weight	30g

ATTENTION:

- The Wireless Exit Button uses 1 unit of a CR2032 battery (similar to a watch battery), **THE BATTERY IS INCLUDED FOR THE EXIT BUTTON.**
- This Wireless Exit Button is only compatible with the **Visionis VIS-8011 and VIS-8012 Wireless Receiver.** Not compatible with no other Receiver.



Disclaimer: VISIONIS reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. Attention: We are not responsible for the improper installation of this kit. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.



sales@visionistech.com



www.visionistech.com